





ProgRes® CF^{scan} and MF^{scan}

CCD Research Cameras - with microscanning technology

Image sensor	2/3" CCD progress. scan	Voltage supply	FireWire powered
CCD sensor type	Color / Monochrome	Power consumption	approx. 8 W
Sensor resolution [max]	1360 x 1024 pixel [1.4 Mpix ... 12.5 Mpix]	Ambient conditions	Temperature: +5 °C ... +35 °C, Humidity: 5 % ... 80 %, non condensing
Active sensor size [H x V]	8.8 mm x 6.6 mm	Storage conditions	Temperature: -10 °C ... +50 °C
Pixel size [W x H]	6.45 µm x 6.45 µm	Dimensions [L x W x H]	145 mm x 93 mm x 123 mm
A / D conversion	14 bit	Weight	approx. 800 g
Pixel clock	12 MHz 24.5 MHz	Application software	ProgRes® CapturePro for PC/ MAC (TWAIN for PC only)
Dynamic range	67 ... 69 dB	SDK	ProgRes® SDK for PC, LINUX, MAC
Exposure times	94 µs ... 300 s	External camera driver	available at: www.jenoptik.com/progres
Analog gain	1x ... 8x	Hardware requirements	PC: MS WIN XP/ Vista /WIN 7 Mac: OS X 10.4 or higher, 3 GHz CPU, 1 GB RAM, 256 MB graphics, FireWire a, Multicore recommended
Max. frame rate [image size]	13 fps [1360 x 1024 pixel] 51 fps [680 x 512 pixel]		
Image resolution	Binning: 2x ... 10x (SDK) Microscan.: 4080 x 3072 2720 x 2048		
Cooling	yes		
Digital interface	FireWire a		
Optical connection	C-Mount (0.63x TV pref.)		
Trigger In / Out	yes		

It is our policy to constantly improve the design and specifications. Accordingly, the details represented herein cannot be regarded as final and binding.

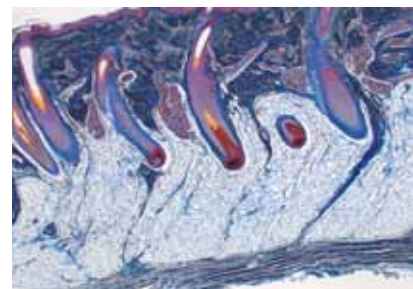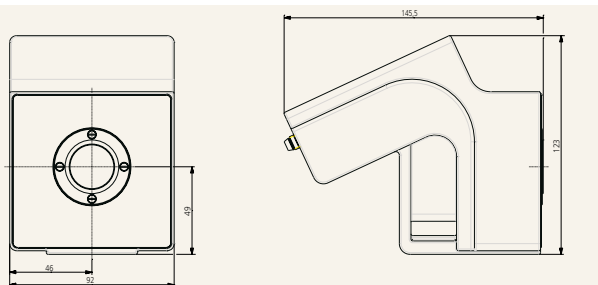

LABEQUIM, S.A. DE C.V.

labequim.com.mx

ventas@labequim.com.mx

TEL/FAX: 01 (222) 219 8815, 274 5072, 274 5073

25 ote. #217 San Pedro Cholula, Puebla, Pue; Col. San Pedro Mexicaltzingo